





**A-PCLXR/L** : Lever lock boring bars carrying the negative CXMG 80° rhombic inserts, for heavy internal turning applications.

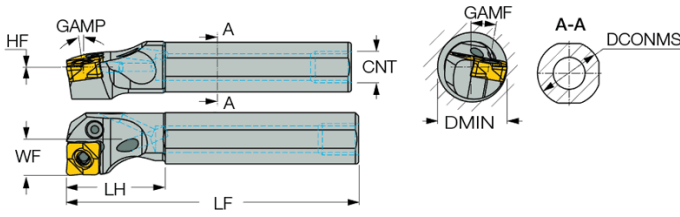

Non ISO    ISO 13399

Designation	DCONMS	LF	LDRED	WF	GAMP	GAMF	DMIN	CNT	R/L
A16Q PCLXL-09X	16.00	180.00	30.0	11.00	8.0	10.0	20.00	UNC 3/8"-16	L
A16Q PCLXR-09X	16.00	180.00	30.0	11.00	8.0	10.0	20.00	UNC 3/8"-16	R
A20R PCLXL-09X	20.00	200.00	30.0	13.00	5.0	10.0	25.00	UNC 3/8"-24	L
A20R PCLXR-09X	20.00	200.00	30.0	13.00	5.0	10.0	25.00	UNC 3/8"-24	R
A25S PCLXL-09X	25.00	250.00	40.0	17.00	5.0	10.0	32.00	UNC 1/2"-20	L
A25S PCLXR-09X	25.00	250.00	40.0	17.00	5.0	10.0	32.00	UNC 1/2"-20	R